

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014951 A1

(51) International Patent Classification⁷: **E04B 5/48**

(21) International Application Number:
PCT/NO2004/000240

(22) International Filing Date: 10 August 2004 (10.08.2004)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20033558 12 August 2003 (12.08.2003) NO

(71) Applicant (for all designated States except US): **VØLSTAD ENERGY AS** [NO/NO]; Stokkamyrv. 15, N-4313 Sandnes (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VØLSTAD, Ove, Charles** [NO/NO]; Bergeneveien 16, N-4355 Kvernaland (NO).

(74) Agent: **HÅMSØ PATENTBYRÅ ANS**; P.O. Box 171, N-4302 Sandnes (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: TEMPERATURE AND VAPOUR PRESSURE REGULATION DEVICE FOR A STRUCTURE

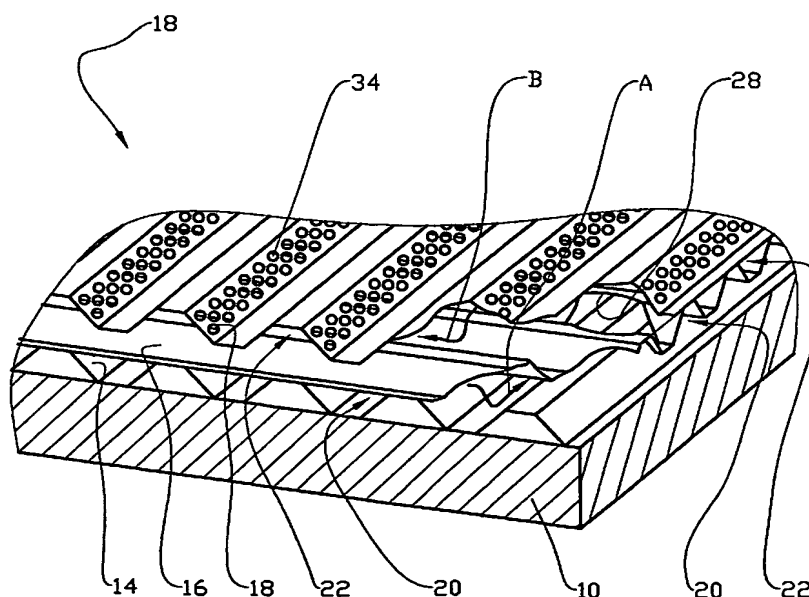

(57) Abstract: A device in a constructional element (19), which may form a supporting element, for temperature regulation in, for example, storey partitioning elements, walls and ceilings of a building structure or refrigerating plant, in which the temperature-regulating surfaces (18) of the constructional element (19) are formed by two or more corrugated cavity-forming (20, 22) layers (14, 16, 18), the cavities (20, 22) being connected to the outlet (26) and inlet (30), respectively, of a heating/cooling unit (24) and being arranged to circulate temperature-regulated air, and in which the temperature-regulating surfaces (18) are provided with perforations (34).

WO 2005/014951 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.